


80 kVA

Offloadable Units



KEY INFORMATION

- 80 kVA three phase diesel generator
- Custom built offloadable unit, fully bundled
- Light weight
- Perkins engine
- Stand-by application rating of 88 kVA
- Prime power rating of 80 kVA three phase
- 500 litre fuel tank
- DSE 7210 control panel
- **SmartWater** - Theft Deterrent

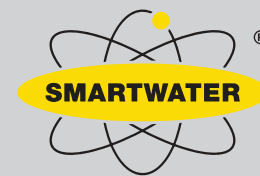

DATATRAK

Our unique GPS/GPRS system enables us to pin point the exact location of every generator, we can also remotely monitor the following status from our 24hr control room:-



- Engine running status
- Output circuit breaker position
- Fuel levels
- Common fault alarm
- Emergency stop activation

Datatrak is installed across our entire fleet as standard.



Tracking
& Telemetry



Remote Fuel
Management



24HR
Response Team





Disaster
Recovery

Dimensions

- Height – 1.94m
- Width – 1.15m
- Length – 2.9m

Weight

- Wet Weight – 2,650Kgs
- Dry Weight – 2,186Kgs

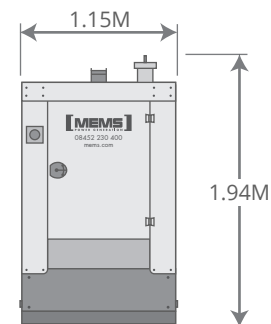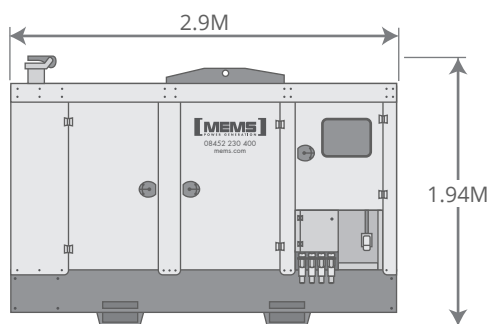

- Custom designed sound attenuated container
- 16A C-Form single phase auxiliary supply input
- Full RCD Protection
- 500 litre bundled and baffled fuel tank
- Socket outlets – 2x16A SPN & 2x32A TPN C-Form outlet sockets
- Datatrak remote monitoring system
- Perkins 1104A-44TG2 engine

- Output of 111A per phase
- Fuel consumption 13.2 litres per hour, based on 75% load
- Electronic Governing
- Shunt excitation system
- Noise level 88dba @ 1m, based on 75% load
- 450 Hours service intervals
- Alternator type – Leroy Somer



mems.com / 08452 230 400 / sales@mems.com

*Disclaimer: Specification may change without prior notice.