

200 kVA TPN

Offloadable Units



Connect

Our unique GPS/GPRS system enables us to pin point the exact location of every generator, we can also remotely monitor the following status from our 24hr control room:-



- Engine running status
- Output circuit breaker position
- Fuel levels
- Common fault alarm
- Emergency stop activation

Connect is installed across our entire fleet as standard.

KEY FACTS


- 200 kVA three phase diesel generator
- Custom built offloadable unit, fully bunded
- Light weight
- Cummins engine
- Stand-by application rating of 220kVA
- Prime power rating of 200kVA three phase
- 600 litre fuel tank
- DSE 7410 control panel
- SmartWater - Theft Deterrent



Tracking and
Telemetry



Remote Fuel
Management



24 Hour
Response Team



Disaster
Recovery

Dimensions

Height – 2.19m



Width – 1.1m

Length – 3.38m

Weight

Wet Weight – 2,900Kgs

Dry Weight – 2,300Kgs

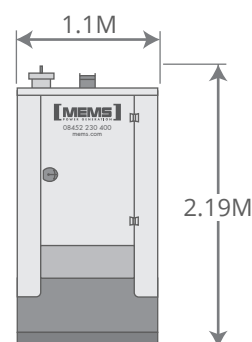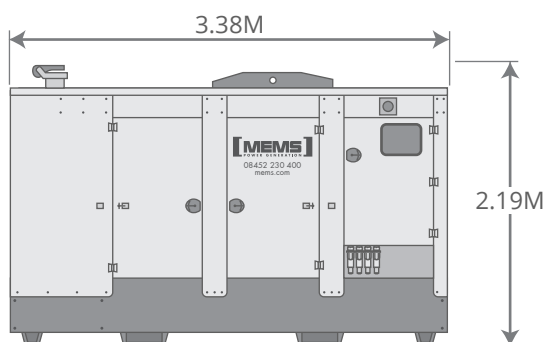

- Custom designed sound attenuated container
- 16A C-Form single phase auxiliary supply input
- Full RCD Protection
- 600 litre bunded and baffled fuel tank
- Socket outlets – 2x125A & 1x63A TPN C-Form outlet sockets
- Connect remote monitoring system
- Cummins QSB engine

- Output of 279A per phase
- Fuel consumption 36 litres per hour, based on 75% load
- Electronic Governing
- Auxiliary winding
- Noise level 78dba @ 1m, based on 75% load
- 450 Hours service intervals
- Alternator type – ECO38