


# 30 kVA SPN

## Offloadable Units




### KEY INFORMATION

- 30kVA single phase diesel generator
- Custom built offloadable unit, fully banded
- Light weight
- Perkins engine
- Stand-by application rating of 30kVA
- Prime power rating of 27kVA
- 185 litre fuel tank
- DSE 7410 control panel
- **SmartWater** - Theft Deterrent



### DATATRAK

Our unique GPS/GPRS system enables us to pin point the exact location of every generator, we can also remotely monitor the following status from our 24hr control room:-



- Engine running status
- Output circuit breaker position
- Fuel levels
- Common fault alarm
- Emergency stop activation

Datatrak is installed across our entire fleet as standard.



Tracking  
& Telemetry



Remote Fuel  
Management



24HR  
Response Team





Disaster  
Recovery

### Dimensions

- Height – 1.5m
- Width – 0.99m
- Length – 1.95m

### Weight

- Wet Weight – 1,165Kgs
- Dry Weight – 980Kgs

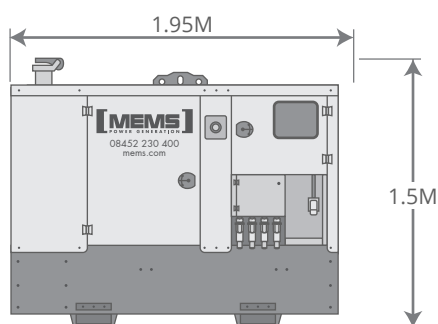

- Custom designed sound attenuated container
- 16A C-Form single phase auxiliary supply input
- Full RCD protection
- 185 litre banded and baffled fuel tank
- Socket outlets – 2x63A SPN C-Form outlet sockets
- Datatrak remote monitoring system
- Perkins 404D engine

- Output of 112A
- Fuel consumption 5 litres per hour, based on 75% load
- Electronic Governing
- Auxiliary winding
- Noise level 74dba @ 1m, based on 75% load
- 450 Hours service intervals
- Alternator type – ECO32